FUJIFILM

FUJINON LENS XF18mmF2 R XF35mmF1.4 R XF60mmF2.4 R Macro

OWNER'S MANUAL

-103	日本語
	ENGLISH
	FRANÇAIS
	DEUTSCH
	ESPAÑOL
	NEDERLANDS
	SVENSKA
	NORSK
	SUOMI
	РУССКИЙ
	ITALIANO
	POLSKI
	中文简
	繁體
	한글
	عربي

BL01626

For Your Safety

Be sure to read these notes before use


Safety Notes

Thank you for your purchase of this product. For repair, inspection, and internal testing, contact your FUJIFILM dealer.

- Make sure that you use the lens correctly. Read these safety notes and the camera Owner's Manual carefully before use.
- After reading these safety notes, store them in a safe place.

About the lcons

The icons shown below are used in this document to indicate the severity of the injury or damage that can result if the information indicated by the icon is ignored and the product is used incorrectly as a result.



The icons shown below are used to indicate the nature of the instructions which are to be observed.

Triangular icons tell you that this



information requires attention ("Important"). Circular icons with a diagonal bar tell you that the action indicated is

- prohibited ("Prohibited").
- Filled circles with an exclamation mark indicate an action that must be performed ("Required").



Do not immerse in or expose to water. Failure to observe this precaution can cause a fire or electric shock.

WARNINGS



Do not use in the

hathroom or shower

Do not disassemble (do not open the case). Failure to observe this precaution can cause fire, electric shock, or injury due to product malfunction.


Should the case break open as the result of a fall or other accident, do not touch the exposed



parts. Failure to observe this precaution could result in electric shock or in injury from touching the damaged parts. Remove the camera battery immediately, taking care to avoid injury or electric shock. and take the product to the point of purchase for consultation





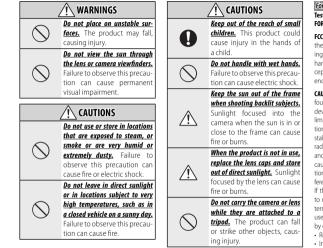

ENGLISH

For Customers in the U.S.A. Tested To Comply With FCC Standards FOR HOME OR OFFICE USE

FC Statement: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.



- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- You are cautioned that any changes or modifications not expressly approved in this manual could void the user's authority to operate the equipment.

Notes on the Grant: To comply with Part 15 of the FCC Rules, this product must be used with a Fujifilm-specified ferrite-core A/V cable, USB cable, and DC supply cord.

For Customers in Canada

CAUTION: This Class B digital apparatus complies with Canadian ICES-003.

IMPORTANT SAFETY INSTRUCTIONS

- · Read these instructions.
- Keep these instructions.
- · Heed all warnings.
- · Follow all instructions.
- Do not use this apparatus near water (excluding waterproof products).
- · Clean only with a dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus

(including amplifiers) that produce heat.

- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personal. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Disposal of Electrical and Electronic Equipment in Private Households

In the European Union, Norway, Iceland and Liechtenstein: This symbol on the product, or in the manual and in the warranty, and/or on its packaging indicates that this product shall not be treated as household waste. Instead it should be taken to an applicable collection point for the recycling of electrical and electronic equipment.



By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

The recycling of materials will help to conserve natural resources. For more detailed information about recycling this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.


In Countries Outside the European Union, Norway, Iceland and Liechtensteim: If you wish to discard this product, including the batteries or accumulators, please contact your local authorities and ask for the correct way of disposal.

Australian C-Tick





Parts of the Lens

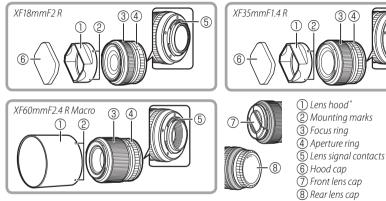

* Lens hoods are for use only with the lenses of the type with which they are supplied, and may cause vignetting when matched with other lenses.


(5)

Attaching the Lens

See the camera manual for information on attaching and removing lenses. Note that this product is not compatible with X mount film cameras.

Removing the Caps


Remove the caps as shown.





Attaching the Hood

Lens hoods reduce glare and protect the front lens element.



Supplied Accessories

- Front lens cap
- Rear lens cap
- Lens hood

ENGLISH

- Cloth wrapping
- Hood cap (XF18mmF2 R and XF35mmF1.4 R only)

Product Care

- When using a lens hood, do not pick up or hold the camera using only the hood.
- Keep the lens signal contacts clean.
- Use a blower to remove dust and lint from the lens surfaces. To remove smudges and fingerprints, apply a small amount of ethanol or lens cleaner to a soft, clean cotton cloth or lens-cleaning tissue and clean from the center outwards using a circular motion, taking care not to leave smears or touch the glass with your fingers.
- Never use organic solvents such as paint thinner or benzene to clean the lens.
- Attach the front and rear caps when the lens is not in use.
- If the lens will not be used for an extended period, store it in a cool, dry location to prevent mold and rust. Do not store in direct sunlight or with naphtha or camphor moth balls.
- Keep the lens dry. Rusting of the internal mechanism can cause irreparable damage.
- Leaving the lens in extremely hot locations could cause damage or warping.

Specifications

Туре	XF18mmF2 R	XF35mmF1.4 R	XF60mmF2.4 R Macro
Lens construction	8 elements in 7 groups	8 elements in 6 groups	10 elements in 8 groups (includes 1
	(includes 2 aspherical elements)	(includes 1 aspherical element)	aspherical and 1 abnormal dispersion element)
Focal length (35 mm format equivalent)	F=18 mm (27 mm)	F=35 mm (53 mm)	F=60 mm (91 mm)
Angle of view	76.5°	44.2°	26.6°
Max. aperture	f/2.0	f/1.4	f/2.4
Min. aperture	f/16	f/16	f/22
Aperture control			
Number of blades	7 (rounded diaphragm opening)	7 (rounded diaphragm opening)	9 (rounded diaphragm opening)
Stop size	1/3 EV (19 stops)	1/3 EV (22 stops)	1/3 EV (20 stops)
Focus range	18 cm – ∞	28 cm – ∞	26.7 cm – ∞
Max. magnification	0.14×	0.17×	0.5×
External dimensions: Diameter x Length*			
(approx.)	ø64.5 × 33.7 mm	ø65.0 × 50.4 mm	ø64.1 × 63.6 mm
*distance from camera lens mount flange			
Weight* (approx.)	116 -	107 ~	215 -
*excluding caps and hoods	116 g	187 g	215 g
Filter size	ø52 mm	ø52 mm	ø39 mm

 $\ensuremath{\mathbbm D}$ Improvements may result in unannounced changes to specifications and appearance.

• Owing to how this lens is constructed, the "Distance indicator" displayed by the camera may in some cases differ from the actual focus distance. Use the "Distance indicator" as a guide only.

